




BILIGHT MODELI SA UGRAĐENIM IZMENJIVAČEM TOPLOTE

GCVS 100 44 20 B11 TSRC

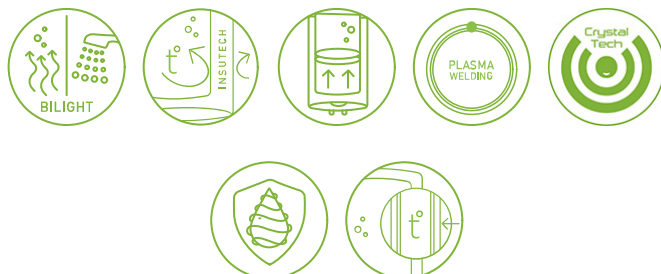

Neto zapremina	98 L
Nazivna snaga	2000 W
Vreme zagrevanja Δt 45K (15 - 60°C)**80°C	0:21 h:min
Energetska klasa	C
Visina	0.985 m
Širina	0.440 m
Dubina	0.467 m
Prečnik	440 mm
Čaura senzora toplote	no
Površina serpentine	0.28 m ²
Zapremina serpentine	1.2 L
Maksimalan protok sanitarne vruće vode kod ΔT 35°C *60-80°C	142 L/h
Maksimalna snaga serpentine *60-80°C	6 kW
Statički gubici	64 W