




BILIGHT WITH A HIGH-EFFICIENT HEAT EXCHANGER

GCV9S(L) 15044 20 B11
TSRCP

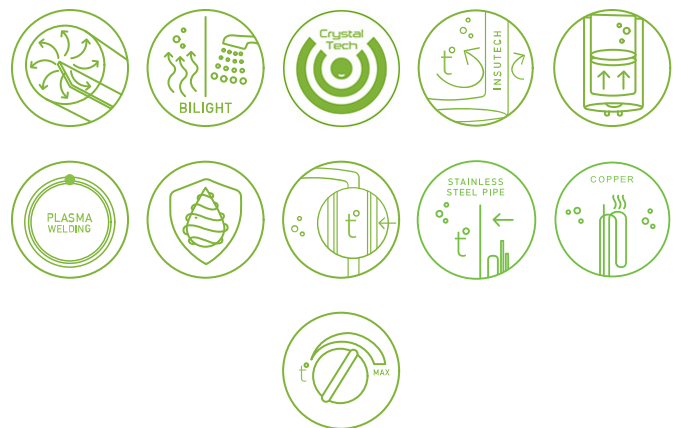

Model	BiLight 150S
Real Volume	138 L
Rated power	2000 W
Heating time Δt 45K (15 - 60°C)**80°C	0:22 h:min
Energy class	D
Height	1.315 m
Width	0.440 m
Depth	0.467 m
Diameter	440 mm
Mounting	Vertical
V40	500 L
Heat exchanger surface	0.7 m ²
Heat exchanger capacity	3.2 L
Continuous flow rate of DHW at ΔT 35°C *60-80°C	433 L/h



Exchange power in continuous mode (max. coil output) *60-80°C	18.5 kW
Standing losses	88 W